

# **RIT-D: Little Queen Supply Area – Notice of Determination Report**

---

Disclaimer

The master document is controlled electronically.  
Ensure latest version prior to use.

---

# Table of Contents

|           |                                                                 |           |
|-----------|-----------------------------------------------------------------|-----------|
| <b>1.</b> | <b>Executive Summary .....</b>                                  | <b>1</b>  |
| 1.1       | Summary .....                                                   | 1         |
| 1.2       | Purpose .....                                                   | 1         |
| 1.3       | The Identified Need .....                                       | 1         |
| 1.4       | Next Steps .....                                                | 2         |
| <b>2.</b> | <b>Introduction .....</b>                                       | <b>3</b>  |
| <b>3.</b> | <b>Definitions .....</b>                                        | <b>4</b>  |
| <b>4.</b> | <b>Identified Need .....</b>                                    | <b>6</b>  |
| 4.1       | Network Overview .....                                          | 6         |
| 4.2       | Description of the Identified Need .....                        | 7         |
| 4.3       | Quantification of the Identified Need .....                     | 8         |
| <b>5.</b> | <b>Key Assumptions in Relation to the Identified Need .....</b> | <b>9</b>  |
| 5.1       | Method for quantifying the Identified Need .....                | 9         |
| 5.1.1     | Safety .....                                                    | 9         |
| 5.1.2     | Reliability .....                                               | 9         |
| 5.2       | Forecast Maximum Demand .....                                   | 9         |
| 5.3       | Forecast Annual Energy .....                                    | 10        |
| 5.4       | Characteristic of Load Profile .....                            | 10        |
| 5.5       | Load Transfer Capacity and Supply Restoration Times .....       | 12        |
| 5.6       | Discount Rates .....                                            | 12        |
| 5.7       | Asset Ratings .....                                             | 12        |
| 5.8       | Value of Customer Reliability .....                             | 12        |
| 5.9       | Potential Credible Options to Address the Identified Need ..... | 12        |
| <b>6.</b> | <b>Technical Characteristics of Non-Network Options .....</b>   | <b>15</b> |
| 6.1       | Size of Support .....                                           | 15        |
| 6.2       | Time of Year, Duration and Location of Support .....            | 15        |
| 6.3       | Reliability of Support .....                                    | 15        |
| <b>7.</b> | <b>Conclusion and Next Steps .....</b>                          | <b>16</b> |
| 7.1       | Conclusion .....                                                | 16        |
| 7.2       | Next steps .....                                                | 16        |
|           | <b>Appendix A: LQ Site Photos .....</b>                         | <b>17</b> |

---

## List of Figures

|                                                                                        |    |
|----------------------------------------------------------------------------------------|----|
| Figure 1: LQ Electrical Single Line Diagram.....                                       | 6  |
| Figure 2: LQ Supply Area.....                                                          | 7  |
| Figure 3: Annual Load Profile at LQ .....                                              | 10 |
| Figure 4: Load Profile on Day of Summer Maximum Demand at LQ .....                     | 11 |
| Figure 5: Annual Load-Duration Curve at LQ .....                                       | 11 |
| Figure 6: Existing Email HQ compound filled double bus switch board - Bus A shown..... | 17 |
| Figure 7: Existing early 1970's electromechanical protection relays .....              | 17 |

## List of Tables

|                                                                                                          |    |
|----------------------------------------------------------------------------------------------------------|----|
| Table 1: Terms and Definitions .....                                                                     | 4  |
| Table 2: LQ Reliability and Safety Risk Qualification (\$'000, Real 2024) .....                          | 8  |
| Table 3: LQ Maximum Demand Forecast.....                                                                 | 10 |
| Table 4: LQ Annual Energy .....                                                                          | 10 |
| Table 5: Summary of LQ Ratings (MVA).....                                                                | 12 |
| Table 6: Summary of Location Specific VCR .....                                                          | 12 |
| Table 7: Base Case.....                                                                                  | 13 |
| Table 8: Credible Options Under Construction.....                                                        | 13 |
| Table 9: Options Regarded as being Not Credible.....                                                     | 13 |
| Table 10: Minimum Peak Demand and Annual Energy Offsets Required from Non-Network or SAPS Solutions..... | 15 |

---

# 1. Executive Summary

## 1.1 Summary

CitiPower is a regulated Victorian electricity distribution business. It distributes electricity to around 349,000 homes and businesses in Melbourne's central business district (CBD) and inner suburbs.

The CitiPower electricity distribution network consists of more than 58,207 poles and over 7,525 kilometres of overhead lines and underground cables. Electricity is received via 70 sub-transmission lines at 33 zone substations, where it is transformed from sub-transmission voltages down to distribution voltages.

The area of CitiPower's electricity distribution network that is the subject of this Regulatory Investment Test for Distribution (RIT-D) is the Little Queen Zone Substation (LQ) supply area (i.e. LQ supply area).

LQ is supplied by three sub-transmission circuits originating from the West Melbourne terminal station (WMTS) via Victoria Market (VM) and Little Bourke Street (JA) zone substations. This zone substation supplies part of the central Melbourne CBD and comprises three 60 MVA transformers operating at 66/11 kV, connected to three double busbar 11 kV buses in a compound insulated metal clad switchboard. LQ was constructed in the early 1970s and most of the original substation equipment remains in service. This includes the existing compound-insulated double bus switchboard and bulk oil-filled switchgear which was designed with no arc fault containment, presenting a safety risk to our operators and personnel accessing this site. The switchboard and secondary systems at LQ are deteriorating in condition and at end of life.

CitiPower has identified potential credible network options to address the asset condition risks at LQ and investigated whether viable non-network or stand-alone power system (SAPS) solutions exist as alternatives to, or supplements for the network options. Based on this report, CitiPower has concluded on reasonable grounds, that none of the potential non-network or SAPS options investigated represent technically or commercially feasible alternatives, nor could any combination of non-network or SAPS options adequately address the identified need. Therefore, CitiPower has determined that the publication of, and the consultation on an options screening report, is not required in this instance.

## 1.2 Purpose

This Notice of Determination report has been prepared by CitiPower in accordance with the requirements of clause 5.17.4, paragraphs (c) and (d) of the National Electricity Rules (NER) version 214. CitiPower is normally required to publish an options screening report and request stakeholder submissions, as detailed in NER clause 5.17.4(e). However, in the event that there are no potential credible non-network or SAPS options (or any combination of those options with or without a network option) that could address the identified need, CitiPower is instead required to publish a Notice of Determination.

## 1.3 The Identified Need

The LQ 11 kV switchboard is non arc fault contained and consists of three compound insulated double bus sections with fifty-six panels containing mainly J18 and J22 bulk oil circuit breakers with five retrofitted Siemens 3AH vacuum circuit breakers installed in 2005 for the capacitor banks.

The insulation of the LQ 11 kV switchboard has been deteriorating over the last several years with an online partial discharge (PD) monitor system installed in November 2017. A number of minor PD sources have been identified and rectified however these repairs are not a long-term solution as other PD sources detected from within the bus by the online monitoring system indicate that imminent replacement is warranted.

Switchgear and cables condition monitoring show that increasing PD in both compound and solid insulation is a problem and has been on steady increase with two to three new locations across the entire switchboard per year for the last five years. For every repair that is undertaken by CitiPower, two new PD locations commence. Due to age of this equipment, new replacement parts are unavailable for this switchboard type. Furthermore, failure of this equipment would likely be catastrophic, resulting in explosion and fire. With four new PD locations detected in the last four months, the deterioration rate is accelerating. Active PD sources now impact more than 47% of the switchboard panels - evenly distributed across all busses.

The original secondary assets at LQ including electromechanical protection relays are also experiencing condition deterioration, and are technically obsolete with limited spares, and no longer supported by vendors. This poses a serious safety and reliability risk for the ongoing fault protection coverage of LQ and its distribution network. Furthermore, the poor condition of the protection devices that are supposed to be protecting this poor condition switchboard, could result in a catastrophic failure, if a simultaneous switchboard internal fault coincides with a protection relay failing to operate.

---

The asset management need at LQ is to maintain a safe and reliable supply of electricity to customers in the LQ supply area. This recognises the risks associated with the existing switchboard, including the increasing probability, severity and consequence of failure – for example<sup>1</sup>

- deterioration in compound-filled assets is typically monitored by measuring partial discharge activity, with changes in partial discharge activity providing early warnings of impending failure; partial discharges have been detected at multiple locations within the switchboard, including the compound-filled cable terminations and cable boxes, circuit breaker spouts and the B-C bus tie area that includes the compound-filled busbars;
- compound-filled switchboards are not designed to contain arc-faults, creating the potential for adverse safety outcomes associated with explosive failures;
- the configuration and loading of LQ are such that a fault would be expected to negatively impact on CitiPower's ability to supply load to the CBD;
- good asset management practice from the broader industry supports the view that compound-filled and non-arc fault contained switchboards pose an increasing safety and reliability risk, and should be progressively removed from service.

The identified need at LQ is to:

- i. protect power sector workers and members of the public from harm caused by equipment failure (Safety); and
- ii. continue to maintain a reliable power supply to the residences and businesses that are dependent on the supply from this distribution network (Reliability).

Solutions to the identified need shall manage and mitigate the increasing risk of secondary asset and switchgear failure, to maintain safety and reliability of electricity supply to CitiPower's customers and workforce within the LQ supply area. Solutions need to support CitiPower plans to reduce the population of non-arc fault contained switchboards that comprise oil filled circuit breakers and electromechanical protection and control relays.

## 1.4 Next Steps

CitiPower is not required to publish and consult on an options screening report in this instance, because it has been determined on reasonable grounds, that there will not be a potential credible non-network or SAPS option that is able to address the identified need, nor any that forms a significant part of a potential credible option.

The total cost of the most expensive credible network option to address the identified need, is greater than the trigger threshold of \$12 million<sup>2</sup> for the publication of and consultation on a Draft Project Assessment Report (DPAR). On this basis, CitiPower shall now prepare and publish a Draft Project Assessment Report (DPAR), as required under NER clause 5.17.4, paragraphs (i) to (m). CitiPower intends to publish the DPAR by 19 September 2024.

For the purposes of referencing this RIT-D, this RIT-D is referred to as *the "Little Queen Zone Substation Secondary Assets and Switchgear Condition" identified need*.

---

<sup>1</sup> <https://www.aer.gov.au/system/files/CitiPower%20-%20Regulatory%20Proposal%20-%2031%20January%202020.pdf>

<sup>2</sup> <https://www.aer.gov.au/networks-pipelines/guidelines-schemes-models-reviews/cost-thresholds-review-for-the-regulatory-investment-tests-2021>

---

## 2. Introduction

This Notice of Determination report has been prepared by CitiPower in accordance with the requirements of clause 5.17.4, paragraphs (c) and (d) of the National Electricity Rules (NER) version 214, for the Little Queen Zone Substation Secondary Assets and Switchgear Condition identified need.

CitiPower is not required to publish and consult on an options screening report in this instance, because it has been determined (on reasonable grounds) that there will not be a potential credible non-network or SAPS option that is able to address the identified need, nor any that forms a significant part of a potential credible option.

This report sets out the reasons for this determination, including the methods and assumptions used in making the determination.

The need for investment and the possible options for addressing the Little Queen Zone Substation Secondary Assets and Switchgear Condition identified need, have been foreshadowed in CitiPower's 2023 Distribution Annual Planning Report (DAPR)<sup>3</sup>

This Notice of Determination report:

- Provides background information on the network limitations at Little Queen Zone Substation (LQ), and for the LQ supply area for which it services.
- Identifies the need which CitiPower is seeking to address, together with the assumptions used in identifying that need.
- Describes the credible options that CitiPower currently considers may address the identified need, including for each:
  - Technical definitions;
  - The risk costs associated with the option for addressing the identified need;
  - The estimated commissioning date; and the total indicative cost (including capital and operating costs), with high-level cost breakdown.
- Sets out the technical characteristics that a non-network or stand-alone power system (SAPS) option would be required to deliver in order to address the identified need.

---

<sup>3</sup> CitiPower: Distribution Annual Planning Report. Available at:  
[https://dapr.powercor.com.au/powercor\\_data/DAPR\\_2023\\_Citipower\\_Distribution%20Annual%20Planning%20Report.pdf](https://dapr.powercor.com.au/powercor_data/DAPR_2023_Citipower_Distribution%20Annual%20Planning%20Report.pdf)

### 3. Definitions

Table 1: Terms and Definitions

| Term  | Definition                                  |
|-------|---------------------------------------------|
| A.C.  | Alternating Current                         |
| AEMO  | Australian Energy Market Operator           |
| AFAP  | As Far As Practicable                       |
| DAPR  | Distribution Annual Planning Report         |
| D.C.  | Direct Current                              |
| DPAR  | Draft Project Assessment Report             |
| DSED  | Demand Side Engagement Document             |
| EUE   | Expected Unserved Energy (MWh pa)           |
| LQ    | Little Queen Zone Substation                |
| JA    | Little Bourke Street Substation             |
| MWp   | Megawatt peak                               |
| NCC   | Network Control Centre                      |
| NEM   | National Electricity Market                 |
| NER   | National Electricity Rules                  |
| PD    | Partial Discharge                           |
| PoE   | Probability of Exceedance                   |
| RIT-D | Regulatory Investment Test for Distribution |
| SAPS  | Standalone Power System                     |
| VCR   | Value of Customer Reliability (\$/MWh)      |
| VM    | Victoria Market Substation                  |

|                              |                                                                                                                                                                                                                                                                               |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| WMTS                         | West Melbourne terminal station                                                                                                                                                                                                                                               |
| 50% PoE                      | The forecast maximum demand has a 50% probability of exceedance (PoE). That is, the forecast maximum demand is expected, on average, to be exceeded once in two years.                                                                                                        |
| 10% PoE                      | The forecast maximum demand has a 10% probability of exceedance (PoE). That is, the forecast maximum demand is expected, on average, to be exceeded once in ten years.                                                                                                        |
| Credible option              | An option that addresses the 'identified need', is commercially and technically feasible, and can be implemented in sufficient time to meet the 'identified need'.                                                                                                            |
| Identified need              | Any capacity, voltage, or safety limitation on the distribution system.                                                                                                                                                                                                       |
| Limitation                   | Any limitations on the operation of the distribution system that will give rise to Expected Unserved Energy or safety risk consequences.                                                                                                                                      |
| Network option               | A means by which an 'identified need' can be fully or partly addressed by expenditure on distribution network assets.                                                                                                                                                         |
| Non-network or SAPS option   | A means by which an 'identified need' can be fully or partially addressed other than by a network option.                                                                                                                                                                     |
| Non-network service provider | A party who provides a non-network or SAPS option.                                                                                                                                                                                                                            |
| Potential credible option    | An option has the potential to be a credible option based on an initial assessment of its ability to address the 'identified need'.                                                                                                                                           |
| Preferred network option     | A credible network option that maximises the present value of net economic benefit to all those who produce, consume and transport electricity in the NEM. The preferred network option can be a network option, or do nothing (i.e. status quo).                             |
| Preferred option             | A credible option that maximises the present value of net economic benefit to all those who produce, consume and transport electricity in the NEM. The preferred option can be a network option, non-network or SAPS option, combination of both, or do nothing (status quo). |

## 4. Identified Need

### 4.1 Network Overview

The area of CitiPower's electricity distribution network that is the subject of this Regulatory Investment Test for Distribution (RIT-D) is the Little Queen Zone Substation (LQ) supply area (i.e. LQ supply area), which is located in the heart of Melbourne's CBD.

LQ is owned and operated by CitiPower, providing power to approximately 5,384 customers, with the majority of the load at LQ comprising of mostly high rise commercial and residential customers.

LQ is supplied by three sub-transmission circuits originating from the West Melbourne terminal station (WMTS) via Victoria Market (VM) and Little Bourke Street (JA) zone substations. This zone substation supplies part of the central Melbourne CBD and comprises three 60 MVA transformers operating at 66/11 kV, connected to three double busbar 11 kV buses in a compound insulated metal clad switchboard with 41 11 kV distribution feeders.

The cyclic rating of LQ with all transformers in service is 180 MVA, and with one transformer out of service the rating reduces to 132 MVA in summer, and 142 MVA in winter. This compares to a forecast 10% PoE maximum demand of 77.8 MVA for 2024/25, rising to 80.7 MVA by 2027/28. The switchboard configuration diagram for LQ, is illustrated in Figure 1.

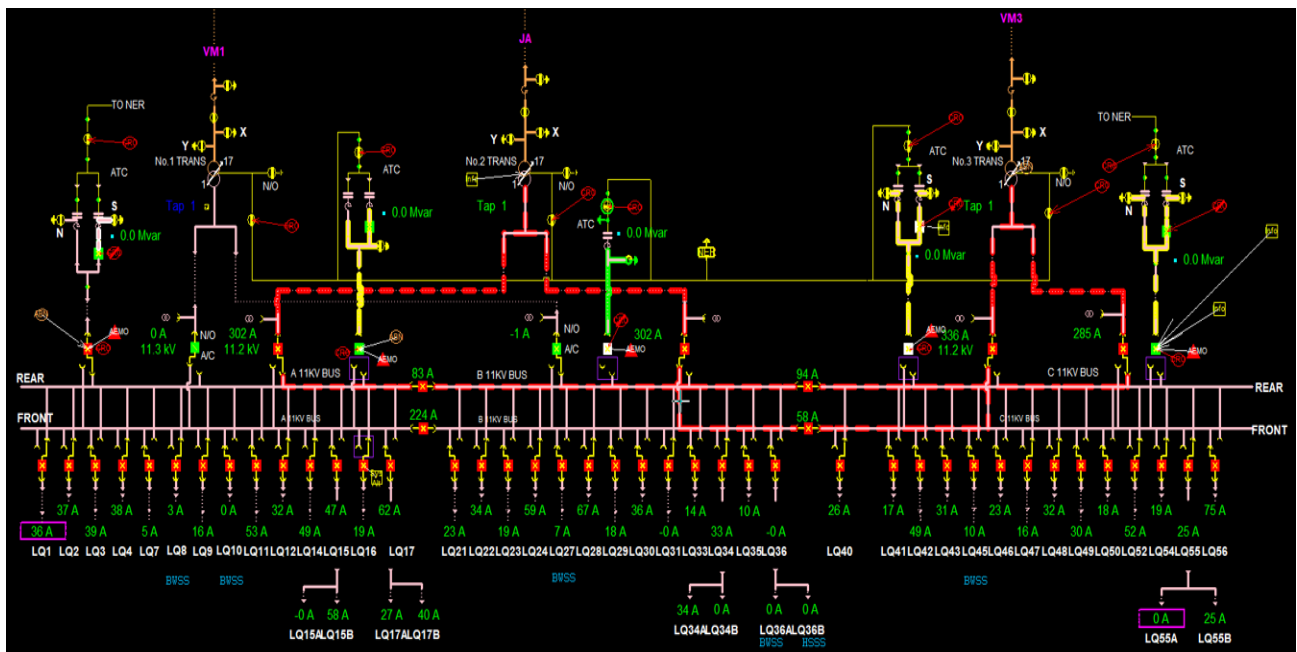


Figure 1: LQ Electrical Single Line Diagram

The power supply coverage of LQ is illustrated in Figure 2. The supply area is bounded approximately by Elizabeth St in the east, Lonsdale St in the north, Collins St in the south, and Spencer St in the west.



Figure 2: LQ Supply Area

## 4.2 Description of the Identified Need

CitiPower has prepared this report to assess whether the reliability and safety needs of LQ could be realised either fully, or in part through non-network or SAPS options. To assess whether a non-network or SAPS option could be beneficial, it is important firstly to define the identified need for this location.

LQ was constructed in the early 1970s and most of the original substation equipment remains in service. This includes the existing compound-insulated double bus switchboard and bulk oil-filled switchgear which was designed with no arc fault containment, presenting a safety risk to our operators and personnel accessing this site. The switchboard and secondary systems at LQ are deteriorating in condition and at end of life.

The condition of the secondary assets<sup>4</sup> and switchgear<sup>5</sup> at LQ, necessary for the provision of a safe and reliable power supply to customers within the LQ supply area, are deteriorating, and technically obsolete, being unsupported by equipment suppliers with no spares.

The LQ 11 kV switchboard is non arc fault contained and consists of three compound insulated double bus sections with fifty-six panels containing mainly J18 and J22 bulk oil circuit breakers with five retrofitted Siemens 3AH vacuum circuit breakers installed in 2005 for the capacitor banks.

The insulation of the LQ 11 kV switchboard has been deteriorating over the last several years with an online partial discharge (PD) monitor system installed in November 2017. A number of minor PD sources have been identified and rectified however these repairs are not a long-term solution as other PD sources detected from within the bus by the online monitoring system indicate that imminent replacement is warranted. These other PD sources are not possible or feasible to repair and are therefore terminal to the switchboard.

Switchgear and cables condition monitoring show that increasing PD in both compound and solid insulation is a problem and has been on steady increase with two to three new locations across the entire switchboard per year for the last five years. For every repair that is undertaken by CitiPower, two new PD locations commence. Four new PD locations have been detected in the last four months (April-July 2024) indicating the deterioration rate is accelerating. Active PD sources now impact more than 47% of the switchboard panels - evenly distributed across all busses. Failure of this equipment would likely be catastrophic, resulting in explosion and fire and extended interruption to electricity supply.

Protection and control systems are critical to the safe and reliable operation of the network. These systems are designed to detect the presence of power system faults and/or other abnormal operating conditions, and to automatically isolate the faulted network by the opening of appropriate high-voltage circuit breakers. Failure to isolate power system faults will

<sup>4</sup> protection, control, monitoring, D.C. supplies and communications equipment

<sup>5</sup> circuit breakers and associated switchboard

invariably result in severe damage to network assets, presenting a serious health and safety hazard to the public, and greatly increases the risk of fire-starts. The original secondary assets at LQ including electromechanical protection relays are also experiencing condition deterioration, and are technically obsolete with limited spares, and no longer supported by vendors. All of these factors increase the likelihood of a power system fault not being detected and safely isolated, or a maloperation. This poses a serious safety and reliability risk for the ongoing fault protection coverage of LQ and its distribution network. For any faults not effectively cleared by the local LQ protection, this will back up to upstream supply protection devices increasing the amount of load impacted and the number of customers with supply at risk impacting areas of the CBD greater than just the LQ supply area.

The asset management need at LQ is to maintain a safe and reliable supply of electricity to customers in the LQ supply area. This recognises the risks associated with the existing switchboard, including the increasing probability, severity, and consequence of failure—for example<sup>6</sup> :

- deterioration in compound-filled assets is typically monitored by measuring partial discharge activity, with changes in partial discharge activity providing early warnings of impending failure; partial discharges have been detected at multiple locations within the switchboard, including the compound-filled cable boxes, circuit breaker spouts and the B-C bus tie area that includes the compound-filled busbars;
- compound-filled switchboards are not designed to contain arc-faults, creating the potential for adverse safety outcomes associated with explosive failures;
- the configuration and loading of LQ are such that a fault would be expected to negatively impact on CitiPower's ability to supply load to the CBD;
- good asset management practice from the broader industry supports the view that compound-filled and non-arc fault contained switchboards pose an increasing safety and reliability risk and should be progressively removed from service.
- The identified need at LQ is to:
  - i. protect power sector workers and members of the public from harm caused by equipment failure (Safety); and
  - ii. continue to maintain a reliable power supply to the residences and businesses that are dependent on the supply from this distribution network (Reliability).

Solutions to the identified need shall manage and mitigate the increasing risk of secondary asset and switchgear failure, to maintain safety and reliability of electricity supply to CitiPower's customers and workforce within the

LQ supply area. Solutions need to support CitiPower plans to reduce the population of non-arc fault contained switchboards that comprise oil filled circuit breakers and electromechanical protection and control relays.

### 4.3 Quantification of the Identified Need

Table 2 summarises the forecast impact of the identified network need discussed in Section 4.2 on customers. The table shows over a 15-year forecasting period, the risk costs and hence the potential market benefits considered, including:

- Expected unserved energy (EUE) cost, which is the value of the energy at risk after taking into account the probability of asset failures or malfunctions at LQ, representing the deterioration in supply reliability within the LQ supply area.
- Safety risk cost, which is the cost of harm to CitiPower's staff and the general public located within the LQ supply area, as a result of anticipated safety incidents caused by asset failures or malfunctions at LQ.
- Total risk which is the sum of the expected unserved energy cost and the safety risk cost.

Table 2: LQ Reliability and Safety Risk Qualification (\$'000, Real 2024)

| Financial Year | Expected Unserved Energy Cost | Safety Risk Cost <sup>7</sup> | Total Risk Cost |
|----------------|-------------------------------|-------------------------------|-----------------|
| 2024           | 691                           | 1173                          | 1864            |
| 2025           | 806                           | 1183                          | 1989            |

<sup>6</sup> <https://www.aer.gov.au/system/files/CitiPower%20-%20Regulatory%20Proposal%20-%202031%20January%202020.pdf>

<sup>7</sup> For simplicity, no AFAP disproportionate factors have been applied to the Safety Risk Cost.

|             |           |           |           |
|-------------|-----------|-----------|-----------|
| 2026        | 846       | 1194      | 2041      |
| 2027        | 875       | 1207      | 2082      |
| 2028        | 901       | 1222      | 2124      |
| 2029        | 935       | 1240      | 2174      |
| 2030        | 978       | 1260      | 2238      |
| 2031        | 1034      | 1284      | 2319      |
| 2032        | 1105      | 1313      | 2419      |
| 2033        | 1138      | 1333      | 2471      |
| 2034        | 1162      | 1355      | 2517      |
| 2035        | 1187      | 1378      | 2565      |
| 2036        | 1214      | 1404      | 2618      |
| 2037        | 1244      | 1434      | 2678      |
| 2038 - 2050 | 1244 p.a. | 1434 p.a. | 2678 p.a. |

For the purposes of this RIT-D, economic evaluations are undertaken over a 25-year period.

## 5. Key Assumptions in Relation to the Identified Need

### 5.1 Method for quantifying the Identified Need

CitiPower adopts its Asset Risk Quantification Guide in quantifying safety and reliability risks associated with asset condition failures and their consequences.

#### 5.1.1 Safety

The safety risk to CitiPower employees and the general public, arising from potential failure or malfunction of network assets is quantified by CitiPower using a safety risk cost, based on the asset conditions. The ability to maintain a safe network for the LQ supply area is increasingly difficult due to the poor and deteriorating condition of the LQ secondary system and switchgear assets.

CitiPower's approach to safety risk is based on the As Far As Practicable (AFAP) principle. The AFAP principle recommends safety risk reduction measures be implemented unless the cost, time or form of the risk reduction measure is grossly disproportionate to the benefit gained from the reduced risk. A "Do Nothing" (or run to failure) approach would result in the poor condition assets remaining in service, deteriorating further, and completely failing to address any safety concerns.

#### 5.1.2 Reliability

CitiPower's reliability planning standard for its zone substation assets is based on a probabilistic planning approach which quantifies Expected Unserved Energy (EUE) defined in terms of megawatt hours (MWh) per annum of energy not supplied, taking into account the unavailability of an asset due to a failure or malfunction, and expresses this financially by applying a Value of Customer Reliability (VCR) (\$/MWh). A more conservative firm rating approach is applied for CBD zone substations.

### 5.2 Forecast Maximum Demand

LQ is located in the heart of Melbourne's CBD. It supplies electricity to over 5,384 being mainly high rise commercial and residential customers.

A credible network, non-network or SAPS solution should consider the forecast maximum demand for the LQ supply area shown in Table 3. Forecasts of the 10% PoE and 50% PoE summer maximum demand and power factor at LQ are presented. These forecasts are based on an expected economic growth scenario.

Table 3: LQ Maximum Demand Forecast

| Financial Year Ending | Power factor | 10% PoE (MVA) | 50% PoE (MVA) |
|-----------------------|--------------|---------------|---------------|
| 2025                  | 0.96         | 77.8          | 74.1          |
| 2026                  | 0.96         | 80.0          | 76.2          |
| 2027                  | 0.96         | 80.7          | 76.8          |
| 2028                  | 0.96         | 80.7          | 76.8          |
| 2029                  | 0.96         | 80.8          | 76.8          |

### 5.3 Forecast Annual Energy

A credible network, non-network or SAPS solution should consider the annual energy requirements of customers within the LQ supply area as shown in Table 4.

Table 4: LQ Annual Energy

| Financial Year Ending | Energy (GWh pa) |
|-----------------------|-----------------|
| 2025                  | 267             |
| 2026                  | 274             |
| 2027                  | 276             |
| 2028                  | 276             |
| 2029                  | 277             |

### 5.4 Characteristic of Load Profile

A credible network, non-network or SAPS solution should be able to support the load profiles below.

CitiPower has prepared load profiles that are characterised by the use of profiles from the most recent 50% PoE year. Based on this approach, the 2022/23 historical demand profile has been prepared and presented herein.

The coincident maximum demand of the customers within the LQ supply area occurs during days of extreme ambient temperature. The annual demand profile at LQ expressed as a percentage of the 50% PoE maximum demand listed in Table 3, is illustrated in Figure 3. Figure 3: Annual Load Profile at LQ

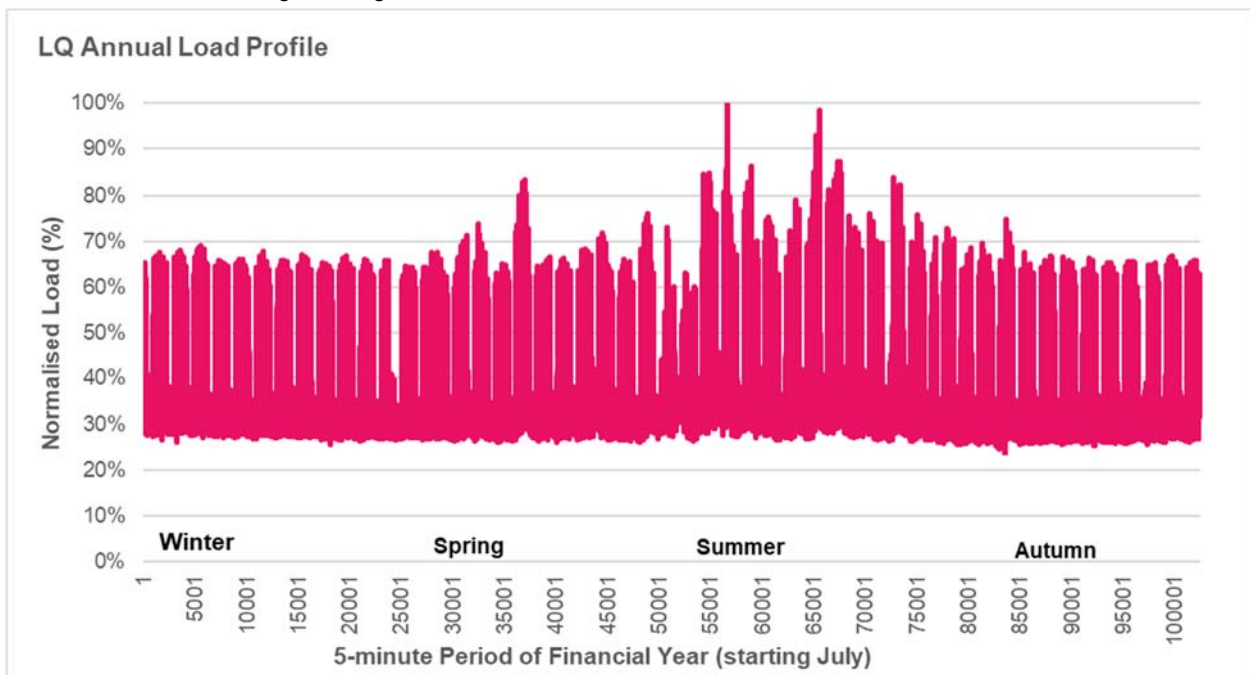


Figure 3: Annual Load Profile at LQ

The load profile on the day of a 50% PoE summer maximum demand is illustrated in Figure 4. The prominence of commercial load within the LQ supply area, results in a maximum demand occurring during business hours in the afternoon.

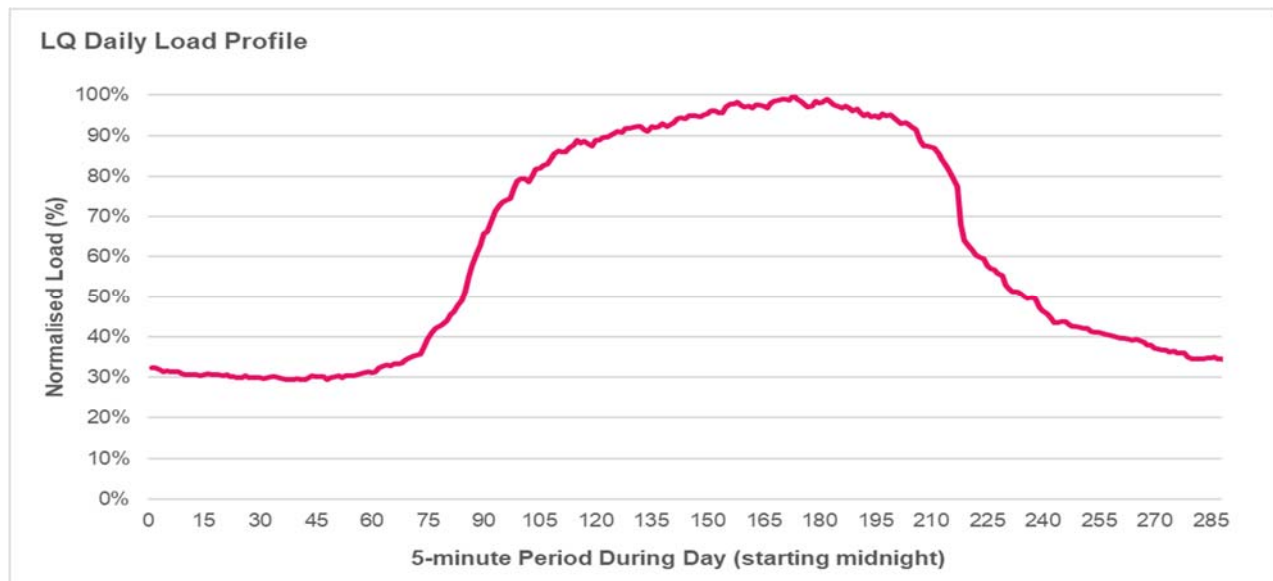


Figure 4: Load Profile on Day of Summer Maximum Demand at LQ

Figure 5 shows the normalised LQ annual load-duration curve for a 50% PoE summer maximum demand year.

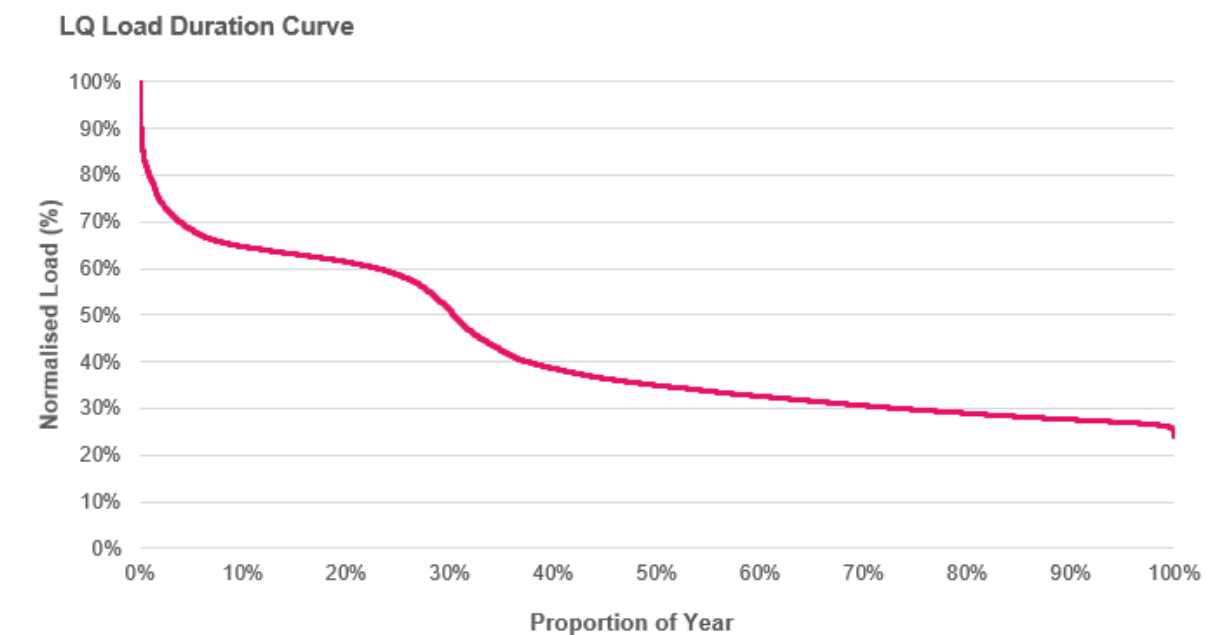


Figure 5: Annual Load-Duration Curve at LQ

The load characteristics can vary marginally from year to year due to changes in weather, and underlying changes in the customers' load usage. Figure 5 shows that load in excess of 80% of the maximum demand lasts for less than 2% of the year. It also shows that LQ has a higher penetration of air conditioning cooling which operates for a very small fraction of the year.

## 5.5 Load Transfer Capacity and Supply Restoration Times

A credible network, non-network or SAPS solution can assume the load transfer capability between LQ and the neighbouring networks of JA and FR zone substations (among others) to be 17.5 MVA for summer 2024/25.

Future load transfer capability levels between LQ and the neighbouring network can be assumed to remain relatively constant.

A credible network, non-network or SAPS solution should provide for supply to be restored within 30 minutes (on average) following the loss of a plant item causing an outage.

## 5.6 Discount Rates

To compare cash flows of options with different time profiles, it is necessary to use a discount rate to express future costs and benefits in present value terms. The choice of discount rate will impact on the estimated present value of net market benefits and may affect the ranking of alternative options. A discount rate of 4.43 per cent is used.

## 5.7 Asset Ratings

The existing capabilities of LQ zone substation for summer and winter are presented in Table 5 for all transformers in service (N), and for one transformer out of service (N-1).

Table 5: Summary of LQ Ratings (MVA)

| Power Flow Condition | Summer Cyclic Rating at 40°C |        | Winter Cyclic Rating at 10°C |        |
|----------------------|------------------------------|--------|------------------------------|--------|
|                      | N                            | N-1    | N                            | N-1    |
| Import <sup>8</sup>  | 180.0                        | 132.0  | 180.0                        | 142.0  |
| Export <sup>9</sup>  | -180.0                       | -120.0 | -180.0                       | -120.0 |

## 5.8 Value of Customer Reliability

Location-specific Value of Customer Reliability (VCR) is used to value reliability of supply. The locational VCR for the LQ supply area was derived from the sector VCR estimates provided by the AER, weighted in accordance with the composition of the load, by sector, and escalated by CPI. This is summarised in Table 6.

Table 6: Summary of Location Specific VCR

| Zone Substation | VCR (\$ per MWh, Real 2024) |
|-----------------|-----------------------------|
| LQ              | 54,123                      |

## 5.9 Potential Credible Options to Address the Identified Need

CitiPower has developed a set of potential credible options to address the network limitations relating to the Little Queen Zone Substation Secondary Assets and Switchgear Condition identified need.

To address the safety need, credible network, non-network or SAPS options would be required to have characteristics that would allow the safe decommissioning or rectification of the LQ secondary systems and switchgear. Furthermore, to address the reliability need in anticipation of the safe decommissioning of LQ, credible options would need to be capable of supplying the annual energy requirements of customers supplied by LQ, and the forecast maximum demand at LQ over the planning horizon, taking into account the available load transfer capacity.

Table 7 provides a summary of the base case option, using the risk costs presented earlier in Table 2.

<sup>8</sup> Power flow towards customer load.

<sup>9</sup> Power flow towards the transmission network.

Table 7: Base Case

| Option                  | Description                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Do Nothing (status quo) | <p>This base case option involves running the LQ secondary systems and 11 kV switchboard to failure. That is, continue with existing maintenance of this equipment, coupled with replacement upon failure.</p> <p>This option does not address the identified need as it does not address the growing network reliability and safety risks. The present value of all costs (EUE and safety risk) is \$38.94 million (Real, 2024).</p> |

Table 8 provides a summary of credible options that could address the identified need.

Table 8: Credible Options Under Construction

| Option                                                                                    | Description                                                                                                                                                                                                                                                                                                                                                                            |
|-------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1. Replace existing switchboard and secondary systems in the same building                | <p>This option replaces the entire 11 kV switchboard and secondary systems within the existing building.</p> <p>The total capital cost of this option is \$28.96 million (Real, 2024).</p> <p>The present value of all costs (capital, O&amp;M, EUE and safety risk) is \$31.56 million (Real, 2024).</p>                                                                              |
| 2. Establish a new switchboard and secondary systems at Gallagher Place switching station | <p>This option installs a new 11 kV switchboard and secondary systems in a nearby switching station, allowing the existing LQ switchboard and secondary systems to be decommissioned.</p> <p>The total capital cost of this option is \$34.24 million (Real, 2024).</p> <p>The present value of all costs (capital, O&amp;M, EUE and safety risk) is \$36.38 million (Real, 2024).</p> |

A credible option needs to be technically and economically feasible, and able to be implemented within a reasonable timeframe to address the identified need. Table 9 describes the options that have been considered by CitiPower and are regarded as not being credible for the reasons set out below. These include all remaining network, non-network and SAPS options.

Table 9: Options Regarded as being Not Credible

| Option                                                                 | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Decommission LQ and transfer all load to surrounding zone substations. | <p>This option allows for the decommissioning of LQ by transferring all of its load to the adjacent zone substations JA and FR. Referring to Table 10, 61 MVA of new feeder capacity (at least 9 new high voltage 11 kV feeders) would need to be established to transfer LQ's entire load base to these zone substations. Either JA or FR would need to be augmented with an additional 60 MVA transformer and 11 kV switchboard. Given the scale of the works required to achieve this outcome would be in excess of \$60 million, this option is not regarded as credible.</p> |
| Power factor correction                                                | <p>The power factor at LQ is currently 0.96 at times of maximum demand, and there is negligible opportunity to reduce demand at the network or customer level as seen by LQ. Therefore, this option is not credible, because it cannot technically address the identified need in relation to reliability or safety risks associated with deteriorating asset condition.</p>                                                                                                                                                                                                      |
| Demand response programmes                                             | <p>Demand response programs are generally designed for peak demand management. The ability of all customers to be self-sufficient in their electricity demand at all times and for all year round to meet the identified need, is considered to be unfeasible, as it effectively requires all customers within the LQ supply area to disconnect from the network. Hence this option is not credible.</p>                                                                                                                                                                          |

| Option                                                                         | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|--------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Customer and/or community intermittent renewable generation and energy storage | <p>Referring to Table 10, distributed generation of up to 61 MW using solar PV is likely to require more than 61 hectares of land<sup>10</sup>. Devoting this amount of land to energy production in a dense, urban environment (especially in a CBD) is unlikely to be feasible. Nevertheless, coupling this with customer solar PV installations in the LQ supply area, particularly with the availability of commercial and residential roof-space and future changes in PV technology to integrate PV into high-rise buildings, could reduce the amount of additional generation required at a competitive cost.</p> <p>The challenge however lies in the provision of storage to back-up the solar PV panels when they are not operating (including during the evenings). A viable storage option that meets the maximum demand at LQ and reliably meets customer requirements requires 'N' batteries (where 'N' <math>\geq 2</math>) each able to supply <math>(61 \div N)</math> MWp, each with an energy to power ratio of around 10<sup>11</sup>. This would enable the system to meet maximum demand and coupled with solar PV, supply the annual energy needs. The costs of the storage alone is likely to exceed those of the preferred network option. For example, the fully installed capex cost of storage is approximately \$0.9 million per MWh<sup>12</sup>, totalling \$540 million<sup>13</sup> (excluding land). Adding generation, demand management or efficiency measures to this option would reduce the battery size requirements.</p> <p>This option would lead to a much higher marginal cost to the customer compared to a network solution cost, and the gap is unlikely to be covered from other market-based revenues. The planning process required for this type of investment, also means this is unlikely to be completed in time to meet the identified need.</p> <p>The storage resources owned by individual customers indicates that no potential existing customer-owned storage would be large enough to meet the identified need.</p> <p>Therefore, this option is not considered to be credible.</p> |
| Dispatchable generation and/or Customer standby generation                     | <p>Referring to Table 10, a viable generation option that meets the maximum demand at LQ and reliably meets customer requirements requires at least two generators to allow maintenance on one generator during off-peak times, each able to supply up to <math>(61 \div N)</math> MWp, where 'N' is the number of generators. This would enable the system to meet maximum demand and supply the annual energy needs.</p> <p>The costs of this are likely to exceed those of the preferred network option. For example, the capex cost of small gas-fired generator is approximately \$1.25 million per MW<sup>14</sup>. For 61 MW of generation, the cost will be over \$76 million<sup>15</sup>, excluding land, connection and operating costs. Adding storage, demand management or efficiency measures to this option would reduce the generation requirements stated above, and potentially the costs.</p> <p>This option would lead to a much higher marginal cost to the customer compared to a network solution cost, and the gap is unlikely to be covered from other market-based revenues. The planning process required for this type of investment, also means this is unlikely to be completed in time to meet the identified need.</p> <p>The maximum demands of individual customers indicate that no potential existing customer-owned generation (standby or otherwise) would be large enough to meet the identified need.</p> <p>Therefore, this option is not considered to be credible.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

<sup>10</sup> <https://www.quora.com/How-much-land-is-required-to-setup-a-1MW-solar-power-generation-Unit-1>

<sup>11</sup> 219,000 MWh pa / 365 days pa / 61 MW = 10.

<sup>12</sup> [https://aemo.com.au/-/media/files/stakeholder\\_consultation/consultations/nem-consultations/2022/2023-inputs-assumptions-and-scenarios-consultation/supporting-materials-for-2023/aurecon-2022-cost-and-technical-parameter-review.pdf](https://aemo.com.au/-/media/files/stakeholder_consultation/consultations/nem-consultations/2022/2023-inputs-assumptions-and-scenarios-consultation/supporting-materials-for-2023/aurecon-2022-cost-and-technical-parameter-review.pdf)

<sup>13</sup>  $61 \times 10 \times 0.9 = \$540$  million.

<sup>14</sup> [https://aemo.com.au/-/media/files/electricity/%E2%80%8Cnem/%E2%80%8Cplanning\\_and\\_%E2%80%8Cforecasting/%E2%80%8Cinputs-assumptions-methodologies/%E2%80%8C2021/Aurecon-Cost-and-Technical-Parameters-Review-2020.pdf](https://aemo.com.au/-/media/files/electricity/%E2%80%8Cnem/%E2%80%8Cplanning_and_%E2%80%8Cforecasting/%E2%80%8Cinputs-assumptions-methodologies/%E2%80%8C2021/Aurecon-Cost-and-Technical-Parameters-Review-2020.pdf)

<sup>15</sup>  $61 \times 1.25 = \$76$  million.

## 6. Technical Characteristics of Non-Network Options

This section describes the minimum technical characteristics that a non-network or SAPS option would be required to deliver to address the identified need.

Like the network options, credible non-network and SAPS options would be required to have characteristics that would allow the safe decommissioning of LQ and would need to be capable of supplying the annual energy requirements of all customers supplied by LQ, and the maximum demand at LQ over the planning horizon.

A credible non-network or SAPS option, or any combination of those (including with a network option) must satisfy timing, operational and the minimum technical requirements stipulated below.

### 6.1 Size of Support

Table 10 outlines the estimated amount of load reduction, or additional generation needed to be supplied by a credible non-network or SAPS solution within the LQ supply area to address the identified need. These are the minimum requirements, because the values reflect the reduced requirement needed due to the availability of load transfer capability away from LQ to its surrounding zone substations.

Table 10: Minimum Peak Demand and Annual Energy Offsets Required from Non-Network or SAPS Solutions

| Financial Year Ending | Load at Risk (MVA) | Hours at Risk (Hours) | Minimum Non-Network or SAPS Support Required |              |
|-----------------------|--------------------|-----------------------|----------------------------------------------|--------------|
|                       |                    |                       | Expected GWh pa                              | Expected MWp |
| 2025                  | 60.3               | 8760                  | 208                                          | 57.9         |
| 2026                  | 62.5               | 8760                  | 216                                          | 60.0         |
| 2027                  | 63.2               | 8760                  | 218                                          | 60.7         |
| 2028                  | 63.2               | 8760                  | 218                                          | 60.7         |
| 2029 <sup>16</sup>    | 63.3               | 8760                  | 219                                          | 60.7         |

### 6.2 Time of Year, Duration and Location of Support

Proposed non-network or SAPS options, at a minimum, must be capable of supplying the entirety of the LQ supply area maximum demand and annual energy, utilising the available transfer capability. This service is required no later than by the end of 2028.

### 6.3 Reliability of Support

Proposed non-network and SAPS options must be capable of reliably meeting electricity demand under a range of conditions and be able to maintain reliability and quality of supply levels for customers supplied within the LQ supply area. As such, redundancy may need to be built into a non-network or SAPS solution in order to maintain reliability of supply. As required under the clause 19.5 of the Victorian Electricity Distribution Code of Practice <sup>17</sup>, a more conservative firm rating (N-1 secure) planning approach is applied for the Melbourne CBD electricity network. If the non-network option is a generator operating in parallel with CitiPower's network, the generator must comply with the requirements set out in CitiPower's Embedded Generation Network Access Standards.

<sup>16</sup> Year of preferred network option.

<sup>17</sup> ESC: Electricity Distribution Code of Practice (clause 19.5, version 2, 1<sup>st</sup> May 2023), <https://www.esc.vic.gov.au/electricity-and-gas/codes-guidelines-and-policies/electricity-distribution-code-practice>

---

## 7. Conclusion and Next Steps

### 7.1 Conclusion

Given the size of the support needed from a non-network or SAPS solution, and it being required at all times of the year to maintain supply reliability within the LQ supply area (following the safe decommissioning of LQ), it is unlikely that a non-network or SAPS option could be technically and economically viable to address the identified need.

In conclusion, this Notice of Determination report demonstrates that none of the non-network or SAPS options are potentially feasible in this instance. The analysis demonstrates that there are no combinations of non-network or SAPS options, or in combination with network options, that are likely to adequately meet the criteria that would require the publishing of, and consultation on a RIT-D options screening report.

### 7.2 Next steps

The total cost of the most expensive credible network option to address the Little Queen Zone Substation Secondary Assets and Switchgear Condition identified need, is higher than the trigger threshold of \$12 million<sup>18</sup> for the publication of and consultation on a Draft Project Assessment Report (DPAR).

Therefore, CitiPower shall now prepare and publish a Draft Project Assessment Report (DPAR), as required under NER clause 5.17.4, paragraphs (i) to (m), which will present a detailed economic assessment of all credible network options that address the identified need. It will also identify the preferred option and its optimum timing.

The DPAR shall provide information required under NER clause 5.17.4, paragraph (j), and will apply the latest available information on reliability and safety risk costs associated with the identified need, and the project cost estimates, in evaluating the economic viability of the preferred option against the alternative options considered.

CitiPower intends to publish the DPAR by 19 September 2024.

---

<sup>18</sup> <https://www.aer.gov.au/networks-pipelines/guidelines-schemes-models-reviews/cost-thresholds-review-for-the-regulatory-investment-tests-2021>

---

## Appendix A: LQ Site Photos



Figure 6: Existing Email HQ compound filled double bus switch board - Bus A shown



Figure 7: Existing early 1970's electromechanical protection relays